

Stainless Steel Manifold



WATCH VIDEO

121°C / 1bar / 20 min
Autoclavable

2
YEAR
WARRANTY

Features

- **Quick-assembly and disassembly**
Each component can be easily removed for cleaning and autoclaving.
- **SS316 stainless steel**
All wetted parts of MultiVac 300 / 600 manifold are made of SS316 stainless steel, which is more durable.
- **Quick-Fit hose barb**
Detachable hose barb can be connected to either side of the manifold quickly towards the vacuum source.
- **Innovative vent valve design**
Adjustable vent valve eliminates water hammer phenomenon and helps drain residual liquid in pipe.
- **Individual control valve**
Control feeds of each filter holder individually.
- **Versatile & compatible**
MultiVac 300 / 600 - MS manifolds include No.8 silicone stoppers that are adaptable to most filter holders.
- **Two-Year Warranty**

Applications

- Microbiological test
- Suspended solid test
- Vacuum filtration

Ordering Information

180300-01

MultiVac 300 - MS, 3 Places SS Manifold

180600-01

MultiVac 600 - MS, 6 Places SS Manifold


200300-01

MF 3, Magnetic Filter Holder, 300 mL

167110-16

No.8 silicone stopper

MultiVac 300 - MS

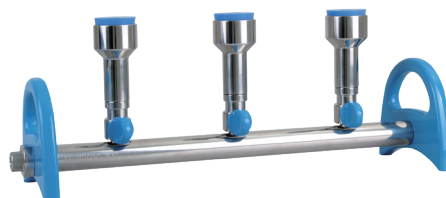

Adjustable vent valve



Quick-Fit hose barb

MultiVac 600 - MS



Specification

Model	MultiVac 300 - MS	MultiVac 600 - MS
Number of branch	3	6
Filter diameter	Depends on filter holder	Depends on filter holder
Funnel capacity	Depends on filter holder	Depends on filter holder
Hose barb	ID8	ID8
Net weight	3.0 Kg	5.1 Kg
Dimension (LxWxH)	48 x 13 x 16 cm	85 x 13 x 16 cm
Part	Material	Material
Body	SS316	SS316
Control valve	SS316	SS316
Adaptor	SS316	SS316
Hose barb / Vent valve	SS316	SS316
Handle / Knob	Aluminum	Aluminum
O-ring	FKM, Silicone	FKM, Silicone

* Materials in contact with the filtrate are SS316, FKM.